

LYFTÖGLA MED TAPP AL KLAS 8

EXCEL[®]

Lyftögla med tapp AL Excel


Material: Seghärtningsstål klass 8. Får ej värmebehandlas. Säkerhetsfaktor: 5:1.

Ytbehandling: Lackerade.

Artnr	18250-0108	18250-0207	18250-0306	18250-0405
Typ	AL06R	AL08R	AL10R	AL12R
Max. last	0.20 ton	0.40 ton	0.70 ton	1.00 ton
a	M 6 x 1.00	M8 x 1.25	M10 x 1.50	M12 x 1.75
b	20 mm	20 mm	20 mm	25 mm
c	34 mm	34 mm	38 mm	47 mm
d	20 mm	20 mm	22 mm	26 mm
e	20 mm	24 mm	30 mm	36 mm
f	17 mm	17 mm	19 mm	23 mm
g	7 mm	7 mm	8 mm	10 mm
Vikt	0.05 kg	0.05 kg	0.08 kg	0.14 kg

Artnr	18250-0504	18250-0603	18250-0702	18250-0801
Typ	AL14R	AL16R	AL18R	AL20R
Max. last	1.20 ton	1.50 ton	2.00 ton	2.50 ton
a	M14 x 2.00	M16 x 2.00	M18 x 2.50	M20 x 2.50
b	30 mm	36 mm	36 mm	40 mm
c	57 mm	65 mm	65 mm	73 mm
d	29 mm	35 mm	35 mm	39 mm
e	40 mm	55 mm	54 mm	59 mm
f	28 mm	30 mm	30 mm	34 mm
g	14 mm	14 mm	14 mm	16 mm
Vikt	0.25 kg	0.36 kg	0.38 kg	0.55 kg

Artnr	18250-0900	18250-1007	18250-1106
Typ	AL22R	AL24R	AL30R
Max. last	3.00 ton	4.00 ton	6.00 ton
a	M22 x 2.50	M24 x 3.00	M30 x 3.50
b	42 mm	55 mm	60 mm
c	82 mm	95 mm	108 mm
d	44 mm	54 mm	59 mm
e	64 mm	84 mm	100 mm
f	38 mm	40 mm	49 mm
g	19 mm	20 mm	24 mm
Vikt	0.74 kg	1.12 kg	1.84 kg

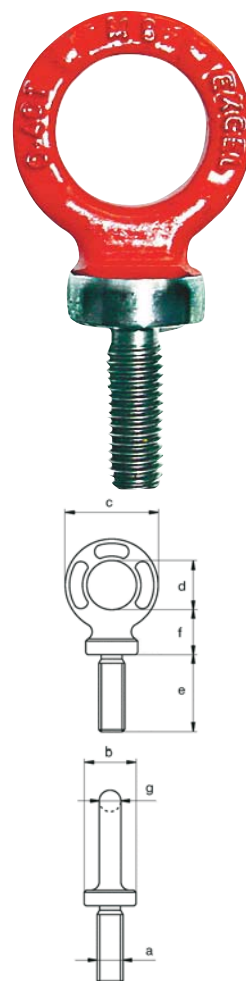

LYFT OCH LASTSÄKRING