

LYFTÖGLOR MED HÅL





Lyftögla DIN 582 Green Pin

Varmsmidda lyftöglor med hål. Tillverkade enligt DIN 582, säkerhetsfaktor 6:1. Ytbehandling: elförzinkade.

Artnr	18249-0102	18249-0201	18249-0300	18249-0409	18249-0508	18249-0607
A	M 6 mm	M 8 mm	M 10 mm	M 12 mm	M 14 mm	M 16 mm
B	20 mm	20 mm	25 mm	30 mm	35 mm	35 mm
C	36 mm	36 mm	45 mm	54 mm	63 mm	63 mm
D	20 mm	20 mm	25 mm	30 mm	35 mm	35 mm
E	8.5 mm	8.5 mm	10 mm	11 mm	13 mm	13 mm
F	36 mm	36 mm	45 mm	53 mm	60 mm	62 mm
Max.last	0.07 ton	0.14 ton	0.23 ton	0.34 ton	0.49 ton	0.7 ton
Vikt/100	4.2 kg	5.2 kg	9.4 kg	16 kg	22 kg	24 kg

Artnr	18249-0706	18249-0805	18249-0904	18249-1001	18249-1100
A	M 20 mm	M 22 mm	M 24 mm	M 27 mm	M 30 mm
B	40 mm	45 mm	50 mm	50 mm	65 mm
C	72 mm	81 mm	90 mm	90 mm	108 mm
D	40 mm	45 mm	50 mm	50 mm	60 mm
E	16 mm	18 mm	20 mm	20 mm	25 mm
F	71 mm	80 mm	90 mm	90 mm	109 mm
Max.last	1.2 ton	1.5 ton	1.8 ton	2.5 ton	3.2 ton
Vikt/100	35.2 kg	58.6 kg	70.6 kg	102 kg	132 kg

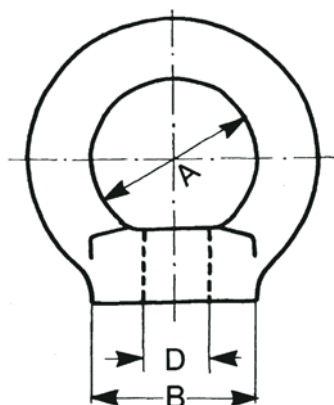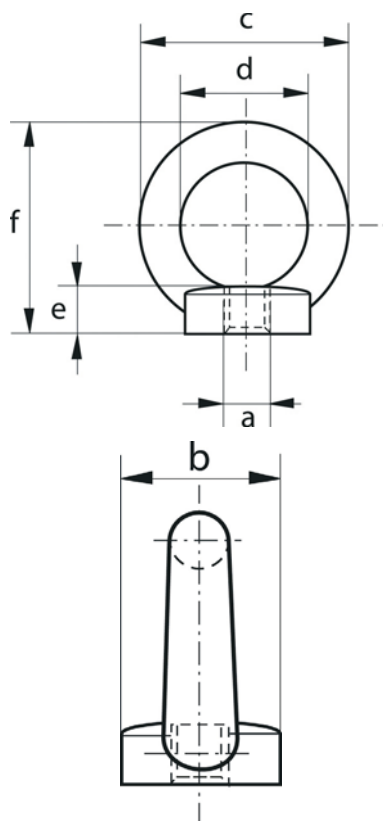

Lyftögla med hål Gunnebo Lifting

Varmsmidda lyftöglor med hål. Normaliserade DIN 582, säkerhetsfaktor 4:1.

Artnr	15612-0107	15612-0206	15612-0305	15612-0404	15612-0503	15612-0602
Gänga D	M8	M10	M12	M16	M20	M24
Max.last ögla axiellt	140 kg	230 kg	340 kg	700 kg	1200 kg	1800 kg
Max last ögla 90°	95 kg	170 kg	240 kg	500 kg	830 kg	1270 kg
A	20 mm	25 mm	30 mm	35 mm	40 mm	50 mm
B	20 mm	25 mm	30 mm	35 mm	40 mm	50 mm
Vikt ca /100	4.9 kg	9.3 kg	15.6 kg	23.8 kg	36 kg	71.8 kg